



Specifications

SMART Board® 7075 interactive display with iQ

Model SBID-7275

Overview

The SMART Board® 7075 interactive display with iQ is the hub of your classroom. iQ technology connects devices, lesson content and pedagogically relevant software to create a cohesive educational experience. PC-free embedded computing provides one-touch access to a diverse suite of SMART applications—Notebook lessons, amp workspaces, lab gamification activities and whiteboard—and collaborative tools, such as wireless screen sharing and a web browser. There’s no need for wires, cables or manual software and firmware updates.




The 75" 4K ultra-high-definition LED display provides optimal image clarity and wide viewing angles. With the Pen ID™ feature, you can assign different appearances to the four pens and write or draw over any application in digital ink.

Object Awareness™ allows you to perform mouse functions with your finger, write in digital ink with the pen, and erase with your palm or eraser—all without switching tools or modes. You can use a variety of gestures in applications, and four users can write or draw at the same time.

See education.smarttech.com for more information.

Dimensions and weights¹

Dimensions

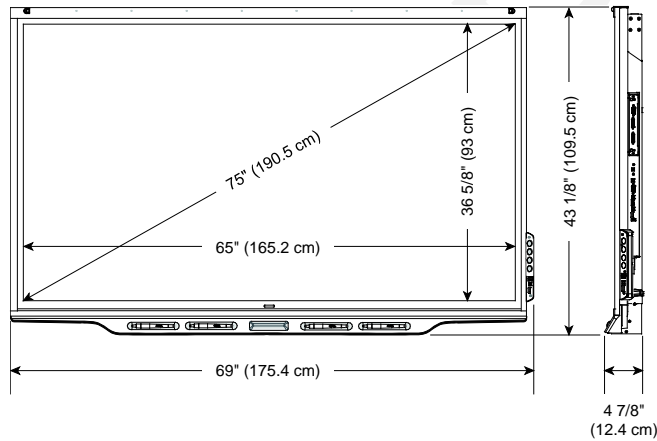

Weight

174 lb. (79 kg)

Shipping dimensions (including pallet)

75 3/8" × 54 1/4" × 11 3/4"
(191.6 cm × 137.8 cm × 30 cm)

Shipping weight

227 lb. (103 kg)



As an ENERGY STAR® certified signage display, the SMART Board 7075 interactive display with iQ meets strict energy efficiency guidelines set by the U.S. Environmental Protection Agency and Department of Energy.

¹All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

Hardware

Interaction

Touch technology	HyPr Touch™ (Hybrid Precision Touch) technology
Multitouch capabilities	10 simultaneous touch, writing and erase points ²
Object Awareness	Behavior adjusts automatically to the tool or object being used, whether it's a pen, finger, eraser or palm.
Pen ID	Four people can write independently and simultaneously, using different colored ink.

Display

Type	LED
Aspect ratio	16:9
Optimal resolution	3840 × 2160 at 60 Hz
Horizontal frequency (typical)	135 kHz
Vertical frequency (typical)	60 Hz
Contrast ratio (typical)	5000:1
Brightness (maximum)	360 cd/m ²
Pixel pitch	0.429 mm × 0.429 mm
Gamut	72% of NTSC
Viewing angle	178°
Response time (typical)	8 ms

1000BASE-T Ethernet	Two external ports for a four-port Gigabit Ethernet switched network connecting the interactive display and the iQ appliance to an external network and an external device such as a computer
----------------------------	---

Presence detection	Dual sensors that reduce startup time and power consumption during inactivity
---------------------------	---

Audio	10 W integrated speakers (×2)
--------------	-------------------------------

Noise level	<30 dBA
--------------------	---------

Included cables and accessories	iQ appliance Country-specific power cable USB cable Pen (×4) Eraser
--	---

iQ appliance

Wireless technology	Bluetooth® 4.0 dual mode (backwards compatible with Bluetooth 2.1 + EDR)
---------------------	--

²Requires SMART Product Drivers to be installed. Some applications might not support all touch points.

Capture options	Establish a Bluetooth wireless connection with a supported mobile device (see below) by scanning the interactive display's unique QR code
Mounting holes	For a standard VESA® 600 mm × 400 mm mounting plate Lower mounting holes 13 3/4" (35 cm) from the bottom of the interactive display
Mounting bracket depth	Minimum depth of 2" (5.1 cm) for all components on the back of the interactive display for airflow

Connectors

Side	<p>Connector panel:</p> <ul style="list-style-type: none"> OPS slot (for the iQ appliance) Stereo 3.5 mm out S/PDIF out Stereo 3.5 mm in VGA in HDMI 2.0 in DisplayPort in USB Type-B (×3) USB Type-A³ RJ45 (×2) 	<p>iQ appliance:</p> <ul style="list-style-type: none"> USB 3.0 Type-A (×2) USB 2.0 Type-B⁴ USB 2.0 Type-B HDMI in HDCP encrypted HDMI out RJ45
Convenience panel	<ul style="list-style-type: none"> HDMI 1.4 in USB Type-B USB Type-A (×2) 	
Bottom	<ul style="list-style-type: none"> AC power in AC power out RS-232 in RS-232 out 	
HDCP support	Version 1.4/2.2	

Installation requirements

Interactive display	See the <i>SMART Board 7000 series interactive displays with iQ installation and maintenance guide</i> (smarttech.com/kb/171164)
----------------------------	---

SMART kapp® app

Apple devices	<ul style="list-style-type: none"> iOS 8.1 or later operating system software 50 MB of storage iPhone 4S or later Third generation iPad or later First generation iPad mini or later Fifth generation iPod touch or later
---------------	---

³For service use only

⁴For service use only

SMART BOARD 7075 INTERACTIVE DISPLAY WITH IQ – MODEL SBID-7275

Android™ devices	Android 4.4.4 (KitKat) or later operating system 50 MB of storage (internal or SD card) 1024 MB of RAM 720p or better screen resolution Bluetooth 2.1 + EDR 3 megapixel or better rear-facing camera (recommended)
------------------	---

SMART kapp viewer

Mobile	Safari for iOS 8.1 or later operating system software Chrome™ for Android 39.0.2171.93 or later
Desktop	Internet Explorer® 10 or later Chrome 39.0.2171.95 or later Firefox® 34.0.5 or later Safari 8.0 or later

Room computers and guest laptops

General requirements	See smarttech.com/SMARTNotebookReleaseNotes
4K UHD	Graphics card that can support 3840 × 2160 resolution at 30 Hz and that has 1 GB DDR 5 memory See kb.smarttech.com/?q=15546

Mini-computers

General requirements	See smarttech.com/SMARTNotebookReleaseNotes
Dimensions	Smaller than 10" × 10" × 2" (25.4 cm × 25.4 cm × 5.1 cm)
Weight	Less than 10 lb. (4.5 kg)
Mounting	VESA 75 mm × 75 mm or 100 mm × 100 mm mounting pattern

Cable requirements

HDMI	HDMI 1.4 compliant or better Maximum length: 23' (7 m)
-------------	---

 **NOTES**

- Use only certified HDMI cables that have been tested to support the performance standard you require.
- The performance of cables longer than 23' (7 m) is highly dependent on the quality of the cable.

DisplayPort	DisplayPort 1.2 compliant or better Maximum length: 23' (7 m)
--------------------	--

USB	Maximum length: 16' (5 m)
------------	---------------------------

Important	Using cables that exceed these maximum lengths may produce unexpected results, degraded picture quality or USB connectivity. Refer to the <i>SMART installation standards</i> (smarttech.com/kb/171035) for a comprehensive guide on cables and extensions for SMART hardware products.
------------------	--

Storage and operating requirements

Power requirements	100V to 240V AC, 50 Hz to 60 Hz
Interactive display and iQ appliance power consumption at 77°F (25°C)	
Standby mode	<2 W
Normal operating	162 W
Maximum operating	260 W
Standalone interactive display power consumption at 77°F (25°C)	
Standby mode	<2 W
Normal operating (out-of-box)	147 W
Operating temperature	41–95°F (5–35°C)
Storage temperature	-4–140°F (-20–60°C)
Humidity	5–80% relative humidity, non-condensing

Certification and compliance

Regulatory certification	EU RED and LV Directives, ISED, cUL, FCC, UL, RCM, CITIC, TRA
Environmental compliance	
European Union	REACH, RoHS, WEEE, Battery and Packaging
U.S.	CONEG Packaging, California Prop 65

Purchasing information

Order number	
SBID-7275	SMART Board 7075 interactive display with iQ and SMART Learning Suite
Optional accessories	
WM-SBID-501	Fixed wall mount for SMART Board interactive displays
Other	See smarttech.com/accessories
Warranty	Three-year limited equipment warranty
Extended warranty	
EWY1-SBID-7275	One-year warranty extension
EWY2-SBID-7275	Two-year warranty extension

DRAFT

smarttech.com/support
smarttech.com/contactsupport

© 2017 SMART Technologies ULC. All rights reserved. SMART Board, SMART kapp, Pen ID, Object Awareness, HyPr Touch, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. iPhone, iPad, iPod touch and Safari are trademarks of Apple Inc., registered in the U.S. and other countries. Google Play, Android and Chrome are trademarks of Google Inc. The Bluetooth word mark is owned by the Bluetooth SIG, Inc. and any use of such marks by SMART Technologies ULC is under license. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Contents are subject to change without notice. 03/2017.