

Specifications

SMART Board® 6086S Pro interactive display with iQ

Model SBID-6286S-PW


Overview

The SMART Board® 6086S Pro interactive display with iQ is the hub of your meeting room.

The 4K Ultra HD LED interactive display provides optimal image clarity and wide viewing angles. SMART's exclusive and proprietary Tool Explorer™ platform allows a wide range of accessories to interact with applications. Unique Simultaneous Tool Differentiation allows multiple users to write simultaneously with a pen, move objects with a finger, and erase digital ink with a palm—all without switching tools, providing uninterrupted collaboration. The display's advanced HyPr Touch™ with InGlass™ touch technology provides a natural, intuitive writing and touch experience with high accuracy and low latency.


Temperature and humidity sensors help facilities managers plan resources by gaining a better understanding of a room user's environmental preferences. The display's iQ embedded computing experience offers one-touch access to collaboration tools, including a digital whiteboard, a web browser, and wireless screen sharing.

See smarttech.com for more information.

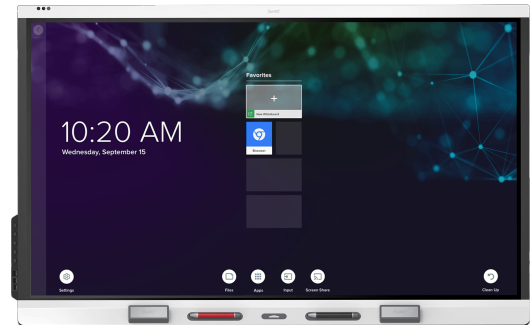

Dimensions and weights¹

Dimensions

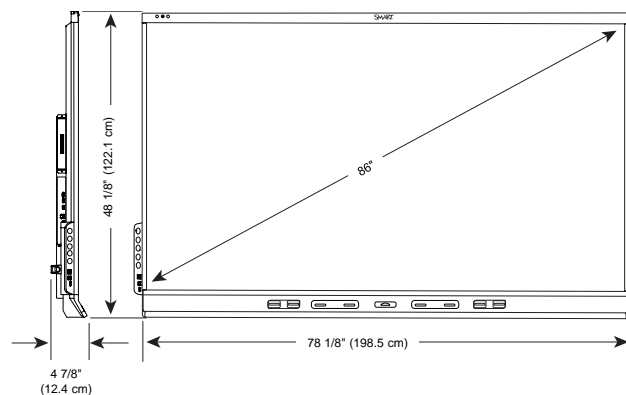

Weight

192 lb. (87 kg)

Shipping dimensions (including pallet)²

86" × 57" × 10 3/8"

(218.6 cm × 144.7 cm × 26.4 cm)

Shipping weight

240 lb. (109 kg)



As an ENERGY STAR® certified signage display, the SMART Board 6086S Pro interactive display meets strict energy efficiency guidelines set by the U.S. Environmental Protection Agency and Department of Energy.

¹All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

²Product ships upright

Highlights

HyPr Touch with InGlass	HyPr Touch with InGlass advanced optical technology ensures highly accurate writing and drawing
Tool Explorer	The Tool Explorer proprietary tool platform supports virtually unlimited pen and tool recognition
Environmental sensors	Integrated temperature and humidity sensors provide real-time measurement of the display's environmental conditions. Data is available via an included SMART app.
Ambient light sensor	Screen automatically dims or brightens, ensuring comfortable viewing in all lighting conditions

Hardware

Interaction

Touch technology	HyPr Touch with InGlass
Multitouch capabilities	Up to 20 simultaneous interaction points ³
Object Awareness™	Behavior adjusts automatically to the tool or object you're using, whether it's a pen, finger, eraser, or palm
Simultaneous Tool Differentiation	Multiple users can touch the display and use pens and erasers at the same time for a natural, fully collaborative experience
Pen ID™	Multiple users can write independently and simultaneously, using different colored ink
Tool Explorer	Support for virtually unlimited pen and tool recognition
Silktouch™	Ultra-smooth finish that allows you to use the display for hours without finger burn

Display

Type	LCD with LED back light
Aspect ratio	16:9
Optimal resolution (HDMI inputs)	4K UHD (3840 × 2160) at 60 Hz
Brightness (maximum)	350 cd/m ²
Pixel dimensions	0.429 mm × 0.429 mm
Viewing angle	178°
Response time	8 ms
Ambient light sensor	Yes
Proximity sensor	Yes
Infrared sensor	Yes

³Chrome OS™ is limited to 10 simultaneous touches, including gestures. Automatic pen recognition, plus palm, pen, and eraser differentiation are available in supported applications.

Room temperature and humidity sensors	Yes
100BASE-T Ethernet	Two external ports for a 4-port Fast Ethernet switched network that connects the interactive display to a network and an external device, such as a computer
Wi-Fi	IEEE 802.11A/B/G/N/AC with 2 × 2 MIMO (both 2.4 and 5 GHz bands) supporting WEP, WPA, WPA2 PSK and 802.1X EAP authentication protocols
Bluetooth®	Bluetooth 4.2 dual mode (backwards compatible with Bluetooth 2.1 + EDR)
Audio	Two 20 W integrated front-facing speakers
Noise level	<32 dBA
Included cables and accessories	<ul style="list-style-type: none"> 1 Country-specific power cable 1 USB cable 2 Pens (red and black) 2 Eraser 1 Remote control 2 AAA batteries for the remote control 1 WM-SBID-200 wall mount
Mounting holes	For a standard VESA 600 mm × 400 mm mounting plate Lower mounting holes 11" (28 cm) from the bottom of the interactive display
Mounting bracket depth	Minimum depth of 1 1/2" (3.7 cm) for all components on the back of the interactive display for airflow
Accessory holes	M4 mounting points located at the top, bottom, left, and right for SMART approved accessories
iQ technology	
iQ experience	iQ experience embedded in the display provides better performance without the need to install a separate appliance
Included apps and features	<ul style="list-style-type: none"> Customizable Home screen Whiteboard Browser Screen Share File and app libraries Writing and drawing over any input Freeze screen and screen shade Automatic software updates

Supported languages

Chinese (simplified)	Korean
Chinese (traditional)	Latvian
Czech	Lithuanian
Danish	Norwegian
Dutch	Polish
English	Portuguese
Estonian	Romanian
Finnish	Russian
French	Slovak
German	Slovenian
Greek	Spanish
Hungarian	Swedish
Italian	Ukrainian
Japanese	Vietnamese
	Welsh

Software**Included software**

iQ Android-based embedded computing
 SMART Ink® and SMART Product Drivers
 Subscription to SMART TeamWorks™ Room edition (included with the SMART Pro service plan for the service plan's term)
 One SMART Meeting Pro® software Room license (included with SMART Pro service plan)
 Ten SMART Meeting Pro software Personal licenses (included with SMART Pro service plan)
 SMART Remote Management (subscription for length of included warranty)

Connectors**Convenience panel**

- 1 HDMI® 2.0 in with HDCP 1.4 and HDCP 2.2 support
- 2 USB 3.0 Type-A (for media)
- 1 USB 3.0 Type-B (for touch)

Connector panel

- 1 Accessory slot (for OPS devices)
- 1 USB 3.0 Type-A (for media)
- 1 USB 2.0 Type-A (for service use only)
- 3 USB 3.0 Type-B (for touch)
- 2 HDMI 2.0 in with HDCP 1.4 and HDCP 2.2 support
- 1 HDMI 2.0 out
- 1 VGA in
- 1 Stereo 3.5 mm in
- 1 Stereo 3.5 mm out
- 1 S/PDIF out
- 2 RJ45
- 1 RS-232 in
- 1 RS-232 out

Back of display	1	AC power in
	1	AC power out

Installation requirements

Interactive display	See the <i>SMART Board 6000S and 6000S Pro series interactive displays installation and maintenance guide</i> (smarttech.com/kb/171414)
----------------------------	--

! IMPORTANT

The display needs an internet connection for downloading and installing important updates. Ask the network administrator to configure the network correctly for the iQ experience. For more information about network configuration, see [Connecting a SMART display with the iQ experience to a network](#).

Room computers and guest laptops

General requirements	See SMART TeamWorks software release notes or SMART Meeting Pro software release notes
4K UHD	Video card that can support 3840 × 2160 resolution at 60 Hz See Minimum requirements for Ultra High Definition or 4K on your interactive flat panel

Mini-computers

General requirements	See SMART TeamWorks software release notes or SMART Meeting Pro software release notes
Dimensions	Smaller than 4 3/4" × 4 3/4" × 1 1/4" (12 cm × 12 cm × 3.3 cm)
Weight	Less than 10 lb. (4.5 kg)
Mounting	VESA 75 mm × 75 mm or 100 mm × 100 mm mounting pattern (two mounting points: left and right)

Cable requirements

HDMI	Maximum length: 23' (7 m)
	NOTES <ul style="list-style-type: none"> • A certified Premium High Speed HDMI Cable is required for a display resolution of 3840 × 2160 at more than 30 Hz (such as 50 or 60 Hz). • The performance of cables longer than 23' (7 m) is highly dependent on the cable's quality.
USB 2.0	USB 2.0 certified Hi-Speed (480 Mbps) support Maximum length: 16' (5 m)

USB 3.0

USB 3.0 certified
SuperSpeed (5 Gbps) support
Maximum length: 9' (3 m)

NOTES

- SMART supports only installations that use directly connected video and USB cables, AC-powered extenders, or USB extenders purchased from SMART.
- You might be able to use higher-grade cables that are longer than specified. If you have problems with such a cable or an extender of any type, test the connection with a shorter cable before contacting SMART Support.

Important

Using cables that exceed these maximum lengths can produce unexpected results, such as degraded picture quality or USB connectivity. Refer to *Installation best practices for SMART products* (smarttech.com/kb/171035) for comprehensive information about cables and extensions for SMART hardware products.

Storage and operating requirements

Power requirements 100V to 240V AC, 50 Hz to 60 Hz

Power consumption at 77°F (25°C)

Standby mode <0.5 W

Normal operating 172 W

Operating temperature 41–95°F (5–35°C)

Storage temperature -4–140°F (-20–60°C)

Humidity 5–80% relative humidity, non-condensing

Certification and compliance (partial)⁴

U.S. / Canada UL, FCC, ISED, CONEG Packaging, Proposition 65

EU / EEA / EFTA / UK CE, UKCA, LVD, CB, EMCD, RED, REACH, RoHS, Battery, WEEE, Packaging, POP, Ecodesign

Australia / New Zealand RCM

Performance standards ENERGY STAR®, HDMI, USB

Purchasing information

Order number

SBID-6286S-PW SMART Board 6086S Pro interactive display with iQ - white

⁴Product availability may vary by region.

Optional accessories

TS-4PEN-MC	Tool Explorer multicolor 4-pen bundle (orange, purple, green, blue) with magnetic penwell
Other	See smarttech.com/accessories

Warranty information

SMART Assure warranty	Includes advanced hardware replacement and access to onsite support. Terms and conditions vary by region. Contact your local reseller or distributor for information and visit smarttech.com/warranty .
------------------------------	--

[smarttech.com/support](https://www.smarttech.com/support)
[smarttech.com/contactsupport](https://www.smarttech.com/contactsupport)

© 2021 SMART Technologies ULC. All rights reserved. SMART Board, SMART Ink, SMART TeamWorks, SMART Meeting Pro, Pen ID, HyPr Touch, Object Awareness, Silktouch, Tool Explorer, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. The Bluetooth word mark is owned by the Bluetooth SIG, Inc. and any use of such marks by SMART Technologies ULC is under license. The Adopted Trademarks HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Contents are subject to change without notice. March 25, 2021.