

Specifications

SMART electric height-adjustable mobile stand

Model FSE-400

Overview


Designed for the current line of SMART Board® interactive displays, the SMART electric height-adjustable mobile stand features 26" (66 cm) of powered height adjustment with a safety bounce-back feature that reverses direction briefly if an obstruction is detected. With its wide footprint and sturdy steel frame, the stand supports displays up to 86" (218 cm) diagonal and 245 lb. (111 kg) total weight including accessories. You can easily roll the stand across smooth floors and secure with the industrial grade 4" locking casters. The stand has a TUV-certified drive system and complies with Americans with Disabilities Act (ADA) standards. The stand also includes VESA mounting points for easy installation of the display and peripherals, a locking storage cabinet, and a power bar.

See smarttech.com for more information on this product.



Dimensions and weights¹

Dimensions

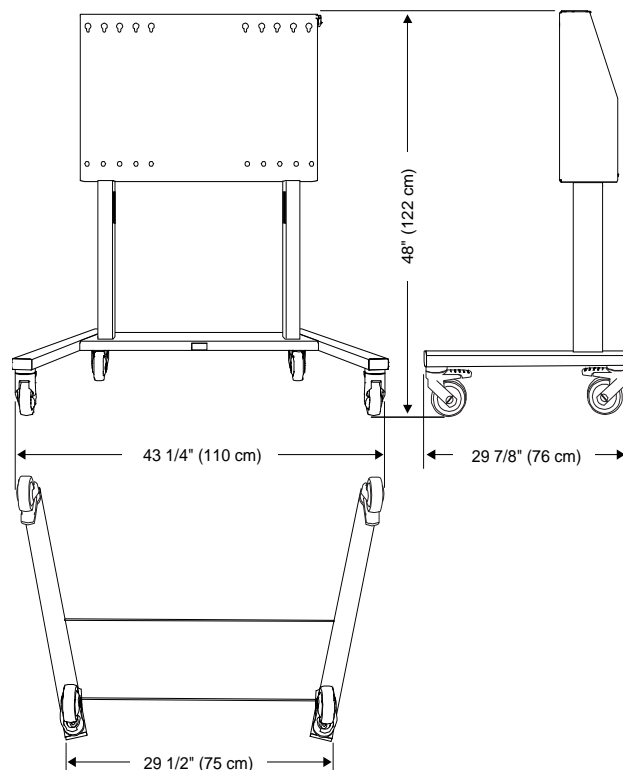

Weight

106 lb. (48 kg)

Shipping dimensions

45 2/8" × 32 5/8" × 7 3/8"
(115 cm × 83 cm × 19 cm)

Shipping weight

115 lb. (52.5 kg)

¹All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

Hardware

Supported SMART Board displays	SMART Board 7000 series, 6000 series, MX and MX100 series displays
Maximum display size	86" (218 cm) diagonal and 80" (203 cm) wide
Minimum display size	65" (163 cm) diagonal
Maximum lift capacity	245 lb. (111 kg)
Minimum weight	92 lb. (42 kg)
Height adjustment	
Range	26" (66 cm)
Maximum extended height	74" (188 cm)
Minimum extended height	48" (122 cm)
Components	
Wheels	4" industrial-grade locking casters
Mounting	VESA® mounting pattern: 300 mm × 400 mm - M8, 500 mm × 400 mm - M6, 600 mm × 400 mm - M8, 700 mm × 400 mm - M8, 400 mm × 200 mm - M8, 800 mm × 200 mm - M8 with adapter (not included)

Storage and operating requirements

Power consumption	
Supply voltage	100V–240V AC, 50 –60 Hz
Nominal voltage	110V AC, 220V AC
Power consumption	
Raising a display (maximum load)	300 W
Standby mode	0.1 W
Duty cycle	10% (2 minutes of operation fully loaded, 18 minutes of rest)
Operating temperature	50–104°F (10–40°C)
Storage temperature	14–158°F (-10–70°C)
Humidity	85% non-condensing

Certification and compliance

Regulatory certification	ISED, CE
Other	ADA
Environmental compliance	
European Union	RoHS, REACH and Packaging Directive
U.S.	CONEG Packaging, California proposition 65

Purchasing information

Order numbers	
FSE-400	SMART electric height-adjustable mobile stand
FSE-400-HL	Handles
FSE-400-CH	Cable hook
FSE-400-LS	Laptop shelf
Optional accessories	See smarttech.com/accessories
Warranty	Five-year limited equipment warranty

[smarttech.com/support](https://www.smarttech.com/support)
[smarttech.com/contactsupport](https://www.smarttech.com/contactsupport)

© 2019 SMART Technologies ULC. All rights reserved. SMART Board, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. All third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Contents are subject to change without notice. 05/2019.